Modulate[™] Straight 1820



Modulate™

Straight 1820







Modulate[™] consists of a set of frames made from aluminium tubes (Ø30 mm) covered with a printed tension fabric graphic. These frames can be connected together using powerful magnets inside each frame. Modulate range is available in 11 different sized

- Thanks to the exclusive **MagLink** magnetic system built into the structure, you can connect the frames by simply touching them together.
- With the **Twist & Lock** system, simply position the foot under the structure, turn it and it's locked!
- The graphics are very easy to maintain thanks to the crease-resistant and machine washable textile cover. Stretch fabric with zip system.



360° MagLink connector in each pole. 4 magnets per structure



Optional 400 mm extension to change the height of the structure



Self-locking system with bungee poles and push-buttons



Simple assembly with numbered frame parts



Central reinforcement tube (Ø 18 mm)



2 stabilising feet with Twist & Lock supplied with each frame



Double-sided tension fabric. Zip system



Modulate[™] carry bag with dedicated compartments for the feet and graphics

Structure informations :	
Item	Modulate Straight 1820
Code	MOD-S-1820
Structure dimensions	1818 (w) x 2000 (h) x 400 (d) mm
Graphic visual area	1800 (w) x 1982 (h) mm
Boxed dimensions	1000 (w) x 245 (h) x 125 (d) mm
Structure weight	7.80 kg
Boxed weight	8.18 kg



OPTIONAL ELEMENTS:



Modulate half feet (pair) MOD-HALF-FOOT-P 218 (w) x 6 (h) x 80 (d) mm



Extension Kit MOD-EXT400MM



Spot LED Flood LED-FLOOD-ARM-BDLK



Spot LED Strip LED-STRIP-ARM-BDLK



1818 mm

Universal light fitting kit US901-C

MIX & MATCH THE 11 MODULATE FRAMES:



Straight 420 MOD-S-420

Straight 424 MOD-S-424

MOD-S-810

Straight 810

Straight 820 MOD-S-820

Straight 824 MOD-S-824

Curved 820 MOD-C-820

Curved 824 MOD-C-824

MOD-SS-824-01

400 mm

MOD-SS-824-02

Straight 1820

Straight 1824 MOD-S-1820 MOD-S-1824

Modulate™ Straight 1820

MOD-S-1820










ELEMENTS





Vertical Centre Pole Sections




Horizontal Central Reinforcement Poles






ASSEMBLY

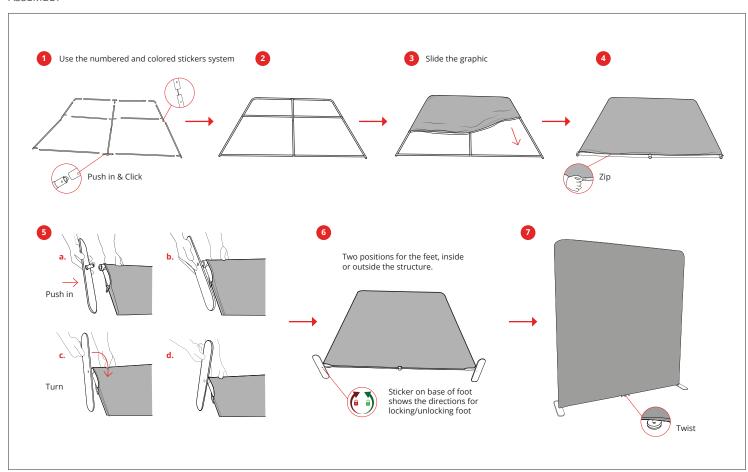

EXTENSION KIT (OPTIONAL) 2000 MM → 2400 MM

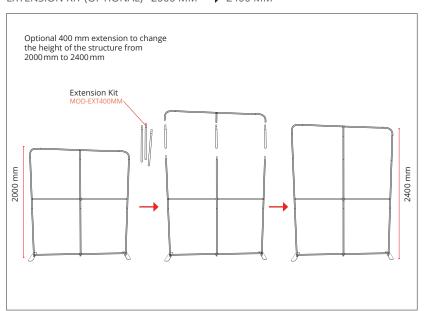

CONNECTING MULTIPLE FRAMES

Remove Turn Push in

MagLink inside the tube

Remove one foot from second frame and align both frames on one foot